





Electric Pallet Truck รถยกกลากไฟฟ้า

Model : CBD12W-Li | CBD15W-Li



- ยกน้ำหนักได้สูงสุด 1,200 และ 1,500 กก.
- ขนาดเล็กกะทัดรัด เลี้ยวคล่องตัว ใช้ในพื้นที่จำกัดได้ดี เช่น ลิฟท์ ร้านค้าขนาดเล็ก
- ระบบมอเตอร์ DC Brushless ไม่มีแปรงถ่าน บำรุงรักษาง่าย
- แบตเตอรี่แบบ Lithium ไม่ต้องเติมน้ำกลั่น บำรุงรักษาง่าย
- ระยะเวลาในการชาร์จแบตเตอรี่ 3 ชม. และสามารถใช้งานต่อเนื่องได้นาน 6 ชม.



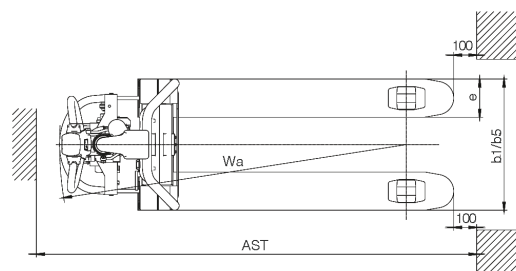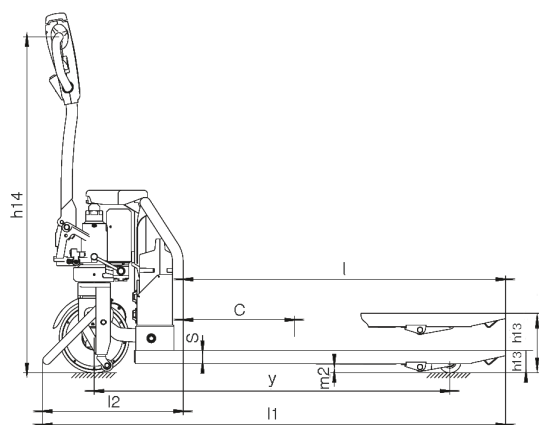

Characteristics	Model		CBD12W-Li-0255	CBD12W-Li-0268	CBD15W-Li-0255	CBD15W-Li-0268
	Power		Battery		Battery	
	Operator Type		Pedestrian		Pedestrian	
	Load Capacity / Rated Load	(kg)	1200		1500	
	Load Centre Distance	C (mm)	600		600	
	Load Distance, Centre of Drive Axle to Fork	x (mm)	940		940	
	Wheelbase	y (mm)	1220		1220	
Weight	Service Weight including Battery	(kg)	140		140	
Wheel	Wheel Type (Front/Rear)		PU / PU		PU / PU	
	Tyre Size - Front	(mm)	Ø 250 x 70		Ø 250 x 70	
	Tyre Size - Rear	(mm)	Ø 80 x 70		Ø 80 x 70	
	Additional Wheels (Dimensions)	(mm)	Ø 44 x 17		Ø 44 x 17	
	Wheel - Number Front/Rear (X = Drive Wheel)		1X-2/4		1X-2/4	
	Track Width - Front	b10 (mm)	325		325	
	Track Width - Rear	b11 (mm)	390	525	390	525
Dimension	Lifting Height	h3 (mm)	190		190	
	Height of Tiller in Drive Position Min /Max	h14 (mm)	710 / 1190		710 / 1190	
	Lowered Height of Fork	h13 (mm)	80		80	
	Overall Length	l1 (mm)	1651		1651	
	Length to Face of Forks	l2 (mm)	501		501	
	Overall Width	b1 (mm)	550	685	550	685
	Fork Dimension	s/e/l (mm)	45 / 160 / 1150		45 / 160 / 1150	
	Distance between Fork-Arms	b5 (mm)	550	685	550	685
	Ground Clearance at Centre of Wheelbase	m2 (mm)	35		35	
	Aisle Width for Pallets 1000 x 1200 Crossways	Ast (mm)	1850		1850	
	Aisle width for pallets 800 x 1200 Lengthways	Ast (mm)	1900		1900	
	Turning Radius	Wa (mm)	1452		1452	
Performance	Travel Speed, Laden / Unladen	(km/h)	3.5 / 3.7		3.5 / 3.7	
	Lift Speed, Laden / Unladen	(m/s)	0.06 / 0.07		0.06 / 0.07	
	Lowering Speed, Laden / Unladen	(m/s)	0.06 / 0.06		0.06 / 0.06	
	Max Gradeability, Laden / Unladen	(%)	5 / 20		4 / 20	
	Brake		Electromagnetic		Electromagnetic	
Motor	Motor Type		DC Brushless		DC Brushless	
	Drive Motor	(kW)	0.6		0.6	
	Lift Motor	(kW)	0.8		0.8	
Battery & Charger	Battery Type		Lithium		Lithium	
	Battery Voltage / Capacity 5 Hours Rate	(V/Ah)	48 / 20		48 / 20	
	Battery Dimension (W x L x H)	(mm)	125 x 340 x 310		125 x 340 x 310	
	Charger Type		External		External	
	Charger Voltage / Current	(V/Ah)	48 / 6		48 / 6	