





Electric Pallet Truck รถยกกลากไฟฟ้า

Model : CBD20RII | CBD25RII | CBD30RII



- ยกน้ำหนักได้สูงสุด 2,000 กก., 2,500 กก. และ 3,000 กก.
- ระบบมอเตอร์ AC ประสิทธิภาพสูง
- ระบบบังคับเลี้ยวเป็นแบบ EPS (Electric Power Steering)
- สามารถถอดเปลี่ยนแบตเตอรี่ออกจากด้านข้างตัวรถได้
- แท่นยืน และแขนป้องกันคนขับ พับเก็บได้



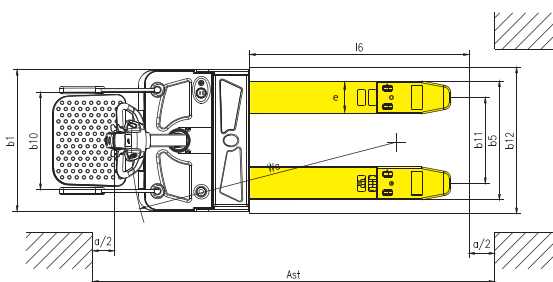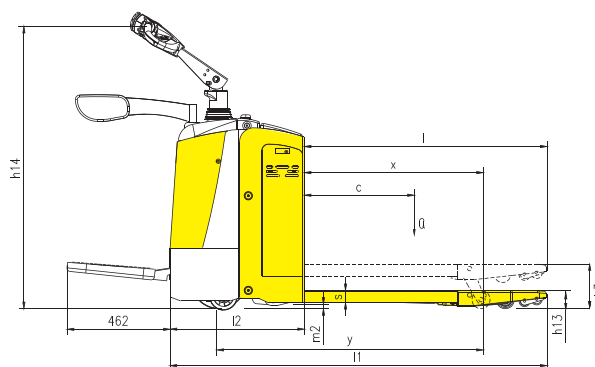

Characteristics	Model			CBD20RII-0255	CBD20RII-0268	CBD25RII-0255	CBD25RII-0268	CBD30RII-0255	CBD30RII-0268
Power				Battery		Battery		Battery	
Operator Type				Pedestrian / Standing		Pedestrian / Standing		Pedestrian / Standing	
Load Capacity / Rated Load	Q	(kg)		2000		2500		3000	
Load Centre Distance	c	(mm)		600		600		600	
Load Distance, Centre of Drive Axle to Fork	x	(mm)		865		865		965	
Wheelbase	y	(mm)		1390		1390		1475	
Weight	Service Weight including Battery		(kg)	775		800		865	
Wheel	Wheel Type (Front/Rear)			PU / PU		PU / PU		PU / PU	
	Tyre Size - Front		(mm)	Ø 250 x 80		Ø 250 x 80		Ø 250 x 80	
	Tyre Size - Rear		(mm)	Ø 82 x 98		Ø 82 x 98		Ø 82 x 98	
	Additional Wheels (Dimensions)		(mm)	Ø 127 x 57		Ø 127 x 57		Ø 127 x 57	
	Wheel - Number Front/Rear (X = Drive Wheel)			1X-2/4		1X-2/4		1X-2/4	
	Track Width - Front	b10	(mm)	540		540		530	
	Track Width - Rear	b11	(mm)	370	505	370	505	370	505
Dimension	Lifting Height	h3	(mm)	200		200		200	
	Height of Tiller in Drive Position Min / Max	h14	(mm)	1110 / 1430		1110 / 1430		1130 / 1400	
	Lowered Height of Fork	h13	(mm)	85		85		85	
	Overall Length (Foldable / Extended Platform)	l1	(mm)	1760 / 2222		1760 / 2222		1840 / 2302	
	Length to Face of Forks	l2	(mm)	610		610		695	
	Overall Width	b1	(mm)	775		775		775	
	Fork Dimension	s/e/l	(mm)	53 / 180 / 1150		53 / 180 / 1150		54 / 180 / 1150	
	Distance between Fork-Arms	b5	(mm)	550	685	550	685	550	685
	Ground Clearance at Centre of Wheel-base	m2	(mm)	40		40		25	
	Aisle Width for Pallets 1000 x 1200 Crossways	Ast	(mm)	1960		1960		2035	
	Aisle width for pallets 800 x 1200 Lengthways	Ast	(mm)	2010		2010		2085	
	Turning Radius	Wa	(mm)	1600		1600		1600	
Performance	Travel Speed, Laden / Unladen		(km/h)	3.9 / 4.1		6.9 / 7.0		6.7 / 6.7	
	Lift Speed, Laden / Unladen		(m/s)	0.05 / 0.08		0.05 / 0.08		0.06 / 0.07	
	Lowering Speed, Laden / Unladen		(m/s)	0.10 / 0.09		0.10 / 0.09		0.07 / 0.07	
	Max Gradeability, Laden / Unladen		(%)	8 / 20		8 / 20		8 / 20	
	Brake			Electromagnetic		Electromagnetic		Electromagnetic	
Motor	Motor Type			AC + EPS		AC + EPS		AC + EPS	
	Drive Motor		(kW)	1.2		1.5		2.2	
	Lift Motor		(kW)	1.2		1.2		2.0	
Battery & Charger	Battery Type			Traction		Traction		Traction	
	Battery Voltage / Capacity 5 Hours Rate		(V/Ah)	24 / 210		24 / 240		24 / 240	
	Battery Dimension (W x L x H)		(mm)	170 x 750 x 534		170 x 750 x 570		250 x 650 x 505	
	Charger Type			External		External		External	
	Charger Voltage / Current		(V/Ah)	24 / 30		24 / 40		24 / 40	

JENBUNJERD CO LTD
 359 Bondstreet Rd. (Chaengwattana 33),
 Bangpood, Pakkred, Nonthaburi
 11120 Thailand

Contact

Industrial Trucks & Parts
 Tel +66 2096 9898 ext. 1202-1204
 Fax +66 2015 2445
 E-mail: mhe@jenbunjerd.com

Overseas Sales

Tel +66 2096 9898 ext. 1401-1404
 Fax +66 2015 2448
 E-mail: exp@jenbunjerd.com

Sole Distributor in Thailand