



Electric Stacker รถยกสูงไฟฟ้า

Model : CDD10R-E | CDD12R-E | CTD12R-E



CDD10R-E | CDD12R-E

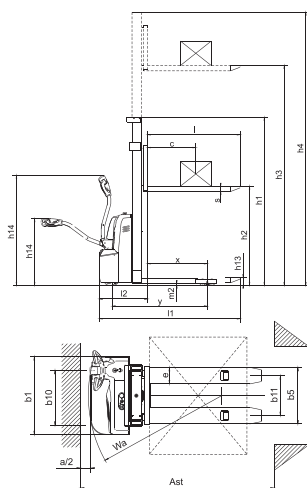
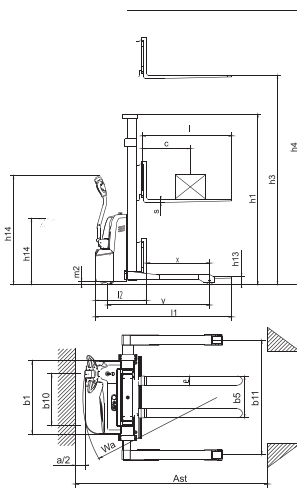




CTD12R-E

- ขนาดเล็กกะทัดรัด ใช้งานในพื้นที่แคบได้เป็นอย่างดี
- แบตเตอรี่แบบ Maintenance-Free Lead-Acid
- ตู้ชาร์จในตัว สะดวกต่อการชาร์จไฟ ใช้งานง่ายไม่ต้องถอดแบตเตอรี่ออกจากรถ
- ใช้งานคล่องตัว วงเลี้ยวแคบ ทำให้คล่องตัวในการใช้งาน
- เหมาะสำหรับขนส่งสินค้าในระยะที่ไม่ไกลมาก
- ยกน้ำหนักได้สูงสุด 1,000 กก. และ 1,200 กก.
- วงเลี้ยวแคบเพียง 1,365 มม. และ 1,490 มม.



reddot design award
winner


CDD10R-E | CDD12R-E

CTD12R-E


Characteristics	Model			CDD10R-E-1669	CDD10R-E-2569	CDD10R-E-3069	CDD12R-E-1669	CDD12R-E-2569	CDD12R-E-3069	CTD12R-E-16SL	CTD12R-E-25SL	CTD12R-E-30SL
	Power			Battery			Battery			Battery		
	Operator Type			Pedestrian			Pedestrian			Pedestrian		
	Load Capacity / Rated Load	Q	(kg)	1000			1200			1200		
	Load Centre Distance	C	(mm)	600			600			600		
	Load Distance, Centre of Drive Axle to Fork	x	(mm)	690			690			770		
	Wheelbase	y	(mm)	1155			1155			1300		
Weight	Service Weight including Battery		(kg)	460	530	545	570	640	660	685	755	770
Wheel	Wheel Type (Front/Rear)			PU / PU			PU / PU			PU / PU		
	Tyre Size - Front			Ø 195 x 70			Ø 195 x 70			Ø 195 x 70		
	Tyre Size - Rear			Ø 80 x 70			Ø 80 x 70			Ø 98 x 82		
	Additional Wheels (Dimensions)			Ø 150 x 60			Ø 150 x 60			Ø 150 x 60		
	Wheel - Number Front/Rear (X = Drive Wheel)			1X - 1/4			1X - 1/4			1X-1/2		
	Track Width - Front	b10	(mm)	523			523			523		
	Track Width - Rear	b11	(mm)	525			525			1040 - 1416		
Dimension	Mast Lowered Height	h1	(mm)	2090	1840	2090	2090	1840	2090	2145	1895	2145
	Lifting Height	h3	(mm)	1600	2500	3000	1600	2500	3000	1600	2500	3000
	Mast Extended Height	h4	(mm)	2090	3060	3560	2090	3060	3560	2145	3100	3600
	Height of Tiller in Drive Position Min /Max	h14	(mm)	670 / 1230			670 / 1230			670 / 1200		
	Lowered Height of Fork	h13	(mm)	90			90			80		
	Overall Length	l1	(mm)	1748			1748			1830		
	Length to Face of Forks	l2	(mm)	598			598			660		
	Overall Width	b1	(mm)	800			800			1155-1532		
	Fork Dimension	s/e/l	(mm)	55 / 170 / 1150			55 / 170 / 1150			35 / 100 / 1150		
	Distance between Fork-Arms	b5	(mm)	695	695	695	695	695	695	200-860		
	Ground Clearance at Centre of Wheelbase	m2	(mm)	30			26			35		
	Aisle Width for Pallets 1000 x 1200 Crossways	Ast	(mm)	2218			2218			2280		
	Aisle width for pallets 800 x 1200 Lengthways	Ast	(mm)	2173			2173			2280		
	Turning Radius	Wa	(mm)	1365			1365			1490		
Performance	Travel Speed, Laden / Unladen		(km/h)	4.75 / 4.84			4.75 / 4.84			4.13 / 4.30		
	Lift Speed, Laden / Unladen		(m/s)	0.07 / 0.09			0.07 / 0.09			0.07 / 0.09		
	Lowering Speed, Laden / Unladen		(m/s)	0.09 / 0.07			0.09 / 0.07			0.09 / 0.09		
	Max Gradeability, Laden / Unladen		(%)	6 / 15			6 / 15			6 / 15		
	Brake			Electromagnetic			Electromagnetic			Electromagnetic		
Motor	Motor Type			DC			DC			DC		
	Drive Motor		(kW)	0.65			0.65			0.65		
	Lift Motor		(kW)	2.2			2.2			2.2		
Battery & Charger	Battery Type			Deep Cycle			Deep Cycle			Deep Cycle		
	Battery Voltage / Capacity 5 Hours Rate		(V/Ah)	24 (12Vx2) / 105			24 (12Vx2) / 105			24 (12Vx2) / 105		
	Battery Dimension (W x L x H)		(mm)	172 x 260 x 214			172 x 260 x 214			172 x 260 x 214		
	Charger Type			Internal			Internal			Internal		
	Charger Voltage / Current		(V/Ah)	24 / 10			24 / 10			24 / 10		

JENBUNJERD

JENBUNJERD CO LTD
 359 Bondstreet Rd. (Chaengwattana 33),
 Bangpood, Pakkred, Nonthaburi
 11120 Thailand

Contact

Industrial Trucks & Parts
 Tel +66 2096 9898 ext. 1202-1204
 Fax +66 2015 2445
 E-mail: mhe@jenbunjerd.com

Overseas Sales

Tel +66 2096 9898 ext. 1401-1404
 Fax +66 2015 2448
 E-mail: exp@jenbunjerd.com

Sole Distributor in Thailand