



Counterbalanced Electric Stacker รถยกสูงไฟฟ้าแบบถ่วงหลัง





Model : CPD15R



- ยกน้ำหนักได้สูงสุด 1,500 กก.
- ยกสูงสุดได้ 3,500 / 4,500 / 5,000 มม.
- ความกว้างขาปรับได้ระหว่าง 200-680 มม. ยาว 1,070 มม.
- ระบบบังคับทิศทางด้วย EPS (Electric Power Steering)
- ระบบขับเคลื่อนเป็น AC Motor
- ถอดเปลี่ยนแบตเตอรี่ออกจากด้านข้างตัวรถได้

AC

EPS

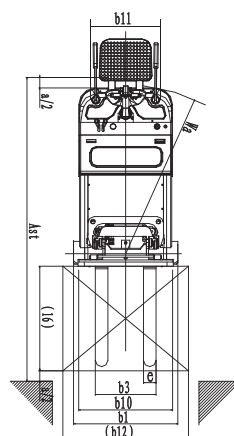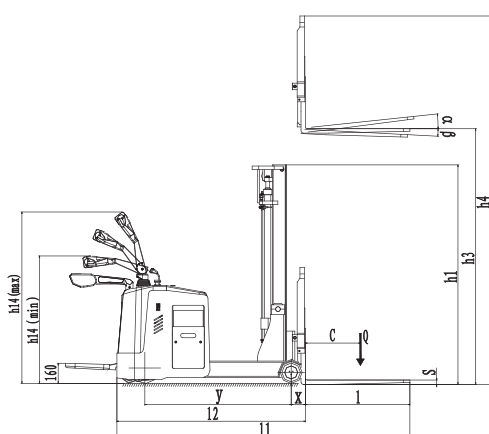

Characteristics	Model		CPD15R-35SL	CPD15R-45SL	CPD15R-50SL
	Power		Battery		
	Operator Type		Pedestrian / Standing		
	Load Capacity / Rated Load	Q (kg)	1500		
	Load Centre Distance	C (mm)	500		
	Load Distance, Centre of Drive Axle to Fork	x (mm)	500		
	Wheelbase	y (mm)	1330		
Weight	Service Weight including Battery	(kg)	2090	2110	2220
Wheel	Wheel Type (Front/Rear)		PU / PU		
	Tyre Size - Front		Ø 280 x 100		
	Tyre Size - Rear		Ø 200 x 100		
	Additional Wheels (Dimensions)		-		
	Wheel - Number Front/Rear (X = Drive Wheel)		1X / 2		
	Track Width - Front	b10 (mm)	-		
	Track Width - Rear	b11 (mm)	900		
Dimension	Mast Lowered Height	h1 (mm)	2250	2010	2260
	Free Lift Height	(mm)	-	1480	1600
	Lifting Height	h3 (mm)	3500	4500	5000
	Mast Extended Height	h4 (mm)	4500	5500	6000
	Height of Tiller in Drive Position Min /Max	h14 (mm)	1080 / 1100		
	Overall Length (Foldable Platform / Extended Platform)	l1 (mm)	2750 / 3250		
	Length to Face of Forks	l2 (mm)	1700		
	Overall Width	b1 (mm)	990		
	Fork Dimension	s/e/l (mm)	35 / 100 / 1070		
	Forks Obliquity Up / Down	a / β (°)	6 / 3		
	Distance between Fork-Arms	b3 (mm)	200 - 680		
	Ground Clearance at Centre of Wheelbase	m2 (mm)	45		
	Aisle Width for Pallets 1000 x 1200 Crossways	Ast (mm)	2990		
	Aisle width for pallets 800 x 1200 Lengthways	Ast (mm)	3120		
	Turning Radius	Wa (mm)	1600		
Performance	Travel Speed, Laden / Unladen	(km/h)	5.8 / 6.0		
	Lift Speed, Laden / Unladen	(m/s)	0.12 / 0.19		
	Lowering Speed, Laden / Unladen	(m/s)	0.3 / 0.1		
	Max Gradeability, Laden / Unladen	(%)	6 / 10		
	Brake		Electromagnetic		
Motor	Motor Type		AC + EPS		
	Drive Motor	(kW)	1.5		
	Lift Motor	(kW)	2.2		
Battery & Charger	Battery Type		Traction		
	Battery Voltage / Capacity 5 Hours Rate	(V/Ah)	24 / 320		
	Battery Dimension (W x L x H)	(mm)	270 x 812 x 550		
	Charger Type		External		
	Charger Voltage / Current	(V/Ah)	24 / 50		