






Electric Stacker รถยกสูงไฟฟ้า

Model : CDDRD12



- เหมาะสำหรับใช้งานในที่แคบ บนชั้นลอย หรือชั้นบน
- ยกน้ำหนักสูงสุด 1,200 กก. ยกได้สูงสุด 1,600 มม.
- สำหรับใช้งานกับพาเลทแบบ Single-face เท่านั้น
- ระยะความสูงเสาต่ำ เหมาะกับพื้นที่ที่จำกัดความสูง
- วงเลี้ยวแคบเพียง 1,338 มม.
- เสาแบบ Single Column มองเห็นทัศนียภาพชัดเจนเป็นเยี่ยม



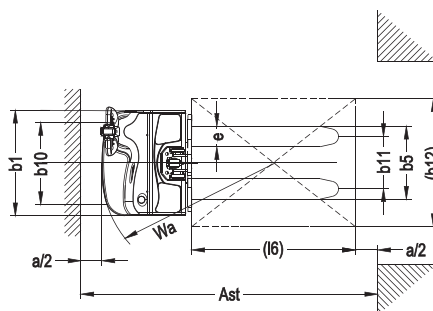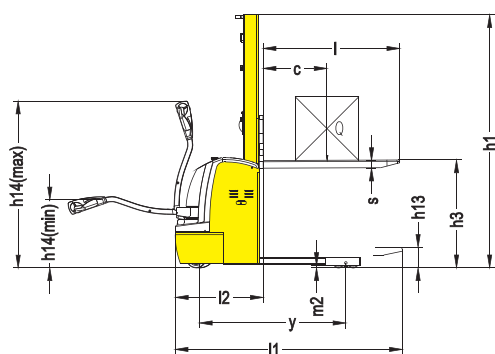

Characteristics	Model			CDDRD12-1657
	Power			Battery
	Operator Type			Pedestrian
	Load Capacity / Rated Load	Q	(kg)	1200
	Load Centre Distance	C	(mm)	600
	Load Distance, Centre of Drive Axle to Fork	x	(mm)	630
	Wheelbase	y	(mm)	1146
Weight	Service Weight including Battery		(kg)	590
Wheel	Wheel Type (Front/Rear)			PU / PU
	Tyre Size - Front			Ø 250 x 70
	Tyre Size - Rear			Ø 80 x 70
	Additional Wheels (Dimensions)			Ø 150 x 62
	Wheel - Number Front/Rear (X = Drive Wheel)			1X-1/4
	Track Width - Front	b10	(mm)	520
	Track Width - Rear	b11	(mm)	400
Dimension	Mast Lowered Height	h1	(mm)	1980
	Lifting Height	h3	(mm)	1600
	Mast Extended Height	h4	(mm)	1980
	Lower Height of Fork	h13	(mm)	90
	Height of Tiller in Drive Position Min /Max	h14	(mm)	615 / 1130
	Overall Length	l1	(mm)	1778
	Length to Face of Forks	l2	(mm)	708
	Overall Width	b1	(mm)	820
	Fork Dimension	s/e/l	(mm)	60 x 170 x 1150
	Distance between Fork-Arms	b5	(mm)	570
	Ground Clearance at Centre of Wheelbase	m2	(mm)	30
	Aisle Width for Pallets 1000 x 1200 Crossways	Ast	(mm)	2180
	Aisle width for pallets 800 x 1200 Lengthways	Ast	(mm)	2220
	Turning Radius	Wa	(mm)	1338
Performance	Travel Speed, Laden / Unladen		(km/h)	5.3 / 5.6
	Lift Speed, Laden / Unladen		(m/s)	0.11 / 0.19
	Lowering Speed, Laden / Unladen		(m/s)	0.16 / 0.11
	Max Gradeability, Laden / Unladen		(%)	6 / 15
	Brake			Electromagnetic
Motor	Motor Type			DC
	Drive Motor		(kW)	0.8
	Lift Motor		(kW)	2.2
Battery & Charger	Battery Type			Deep Cycle
	Battery Voltage / Capacity 5 Hours Rate		(V/Ah)	24 (12Vx2) / 105
	Battery Dimension (W x L x H)		(mm)	165 x 255 x 230
	Charger Type			Internal
	Charger Voltage / Current		(V/Ah)	24 / 8